
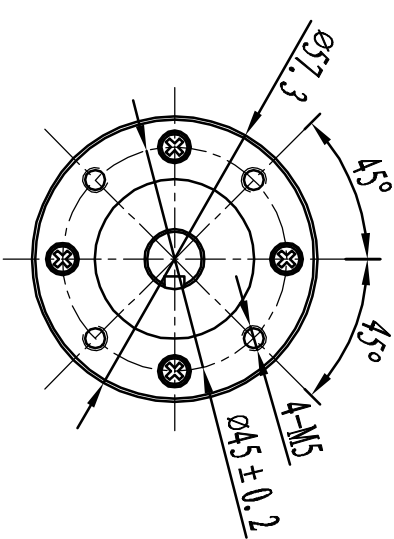


Dimension:
Unit:mm

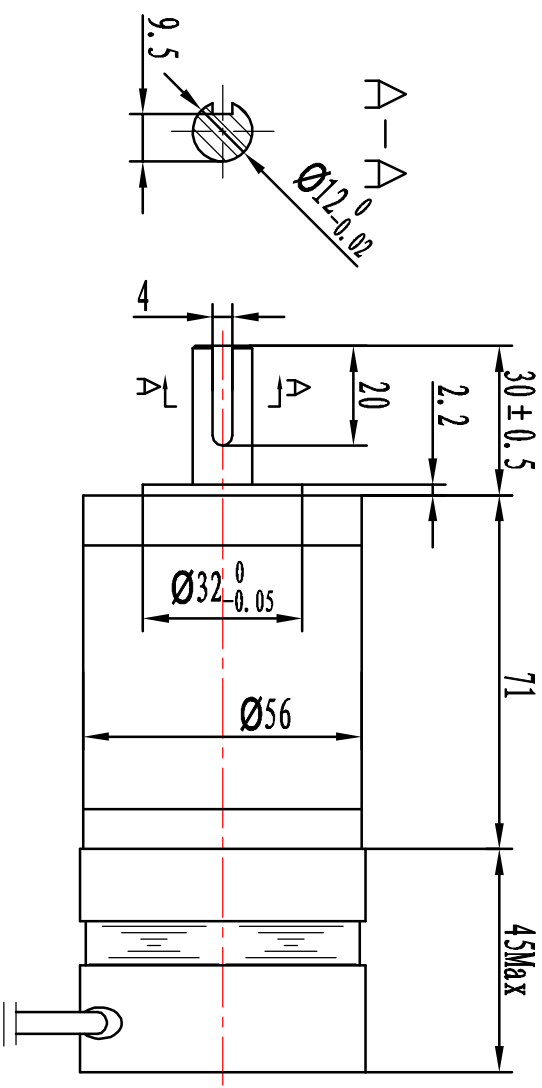



ROTATION: CCW SEE FROM LEAD END	
MANUFACTURER MODEL	JK57BLS005-01PG65
PHASE TO PHASERESISTANCE	2.3±10% OHMS
NOMINAL VOLTAGE	12 VDC
NO LOAD SPEED	2400±10% RPM
NO LOAD CURRENT	2 Amps Max.
RATED TORQUE	0.035 N-m
RATED SPEED	1950±10% RPM
OUTPUT POWER	7.1 W
BACK EMF CONSTANT	5 V/KRPM
TORQUE CONSTANT	0.048 N-m/A
INSULATION CLASS	B
MOTOR SPECIFICATIONS WITH PLANETARY GEAR	
RATED TORQUE	1.6 N-m
RATED SPEED	30±10% RPM
RATIO	65:1

ELECTRICAL CONNECTION TABLE			
+5V	RED	红	
HALL U	BLU	蓝	
HALL V	GRE	绿	UL1007 26 AWG
HALL W	WHI	白	
GND	GND	黑	
PHASE U	YEL	黄	
PHASE V	RED	红	UL1007 20 AWG
PHASE W	BLK	黑	

REV.	QTY.	No.	SIG.	DATE
DESIGN			STD.	
CHECK				
PROC.			APPR.	

Title:				Specification				Shenzhen Earth House Technology Co., Ltd			
CLS.MAK				WEIGHT SCALE				57BL S005-01PG65			
PAGE:				1/1				www.cn-silkroad.cn			

Connection diagram:



Hall sensor cable
Note: hall sensor power supply
voltage +5 to +20VDC

Wiring cable